


## Customer Vehicle Loading

FOR ASSISTANCE PLEASE CALL: (08) 6313 1000

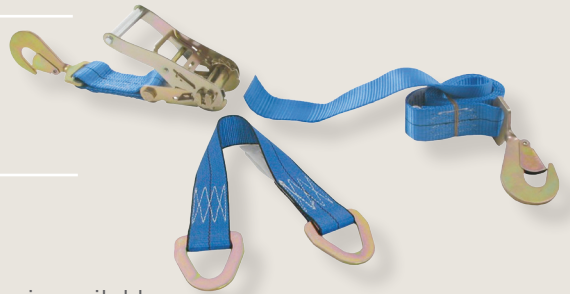

### LOADING AND RESTRAINT

- A 50mm towball loan trailer (refundable deposit) or delivery service is available
- Only webbing straps with a ratchet tensioner to be used to secure the load. Brikmakers can sell or hire these straps to you if required.
- Webbing straps made to Australian Standards will have loading capacity marked on the strap
- The minimum strap to be used is a 35mm strap which has a 1500kg lashing capacity.
- Loading position: minimum 600mm in from the rear of the tray and preferably as close to the front or headboard as possible.

### VEHICLE LOAD LIMITS

- There are load limits that apply to your vehicle and/or trailer. Refer to the table on page 2 for an estimation of whether your vehicle can carry the capacity of brick product you wish to purchase.
- Retail and yard staff will confirm your limits prior to entry in the yard. Brikmakers WILL NOT load any vehicle or trailer that is not suitable nor roadworthy. We will not load pieces or product into your vehicle unless it is secure. Typical cargo hold requirements include, but are not limited to.
  - (a) Ute or small truck;
  - (b) Sedan, wagon or 4-wheel drive with a fixed cargo barrier, netting or similar load restraint.
  - (c) Trailer/loan trailer - Your vehicle must be rated to the towing capacity with a correct tow ball size and hitch. Where a trailer is rated to carry more than half a pallet, the towing vehicle must be rated and equipped to be able to tow the trailer (e.g. braked trailer). This information will be found on your vehicle towing capacity plate or owners manual.
- **TRAILER:** A Typical 6x4 box trailer has a load limit of 750kg (combined weight of trailer (e.g. 250kg) and load (500kg)) meaning a maximum of half a pallet of bricks can be loaded.
- **SINGLE VEHICLE (UTE):** Will not be loaded past its maximum loading limit.
- **VEHICLE WITH TRAILER:** Vehicle must be rated to carry loaded trailer and WILL NOT be loaded past the combined maximum loading limit.

### PROCEDURE IF CUSTOMER VEHICLE OR TRAILER IS NOT DEEMED SUITABLE:

- If your vehicle is not deemed suitable or roadworthy by Brikmakers staff at time of purchase or loading, you must accept the decision and:
  - (a) Hire a 50mm towball loan trailer; or
  - (b) Organise delivery or an alternative vehicle that meets safety criteria; or
  - (c) Not proceed with sale.

**DISCLAIMER:** OWNER ACCEPTS RESPONSIBILITY FOR LOADING AND RESTRAINT OF BRICK/PAVING PRODUCT ONCE IT LEAVES BRIKMAKERS PREMISES

# Brikmakers Customer Pick-Ups

- Refer to the table below for an estimation of whether your vehicle can carry the capacity of bricks you wish to purchase. Remember to include the weight of the trailer in your calculation.
- We reserve the right to refuse to load any vehicle and/or trailer deemed unsafe or inappropriate for the load requested.
- Courtesy trailers are available free of charge and we encourage and prefer use of Brikmakers trailers.
- For all pick-ups, unless you have a ute, large 4WD or a small truck and a trailer with brakes, the maximum load is 500kg.
- For further information please refer to the Road Transport Safe Towing Bulletin:  
[www.transport.wa.gov.au/mediaFiles/licensing/LBU\\_VS\\_IB\\_107.pdf](http://www.transport.wa.gov.au/mediaFiles/licensing/LBU_VS_IB_107.pdf)

Rated Towing Capacity (Examples of utes & 4WD)	Trailer with Brakes	Trailer without Brakes
Ford Falcon Ute, Ranger, Territory	<b>Maximum 2000 kg</b>	<b>Maximum 500 kg</b>
Isuzu D-Max Crew Cab Ute		
Jeep Grand Cherokee		
Mazda BT-50		
Nissan Navara, Patrol		
Toyota Landcruiser		
Toyota Hilux		
Rated Towing Capacity (Examples of large sedans and wagons)	Trailer with Brakes	Trailer without Brakes
Commodore	<b>Maximum 500 kg</b>	<b>Maximum 500 kg</b>
Commodore Wagon		
Ford Fairlane		
Holden Statesman		
Honda CRV		
Mazda 6 Wagon		
Toyota Corolla		
Rated Towing Capacity (Examples of small passenger cars)	Trailer with Brakes	Trailer without Brakes
Mazda 3 Hatch	<b>Maximum 500 kg</b>	Refer to 'Loose Pieces' (below)
Barina, Yaris, Fiesta, Focus etc	Refer to 'Loose Pieces' (below)	

Loose Pieces:		
4 cylinder vehicle Small 4 cylinder vehicle and all hatchbacks	Max. 100 kg Max. 70 kg	Loose pieces will only be loaded into a fully enclosed boot or luggage compartment to protect rear passengers from items in the boot entering the main cabin. <ul style="list-style-type: none"> <li>• Mesh/netting must be used if you are unable to enclose the luggage compartment.</li> <li>• Tie down straps must be used at points of attachment.</li> </ul>
6 cylinder vehicle	Max. 150 kg	
1 tonne ute	Max. 1000 kg	